



Assessing the Influence of Soil Physical Properties on the Puddling Quality: A Comprehensive Review

B. Priyadharshini ^a, S. Thambidurai ^{a*}, P.K. Padmanathan ^a,
Kamaraj P ^b, Patil Santosh Ganapati ^c and R. Kavitha ^a

^a Department of Farm Machinery and Power Engineering, AEC&RI, TNAU, Coimbatore, India.

^b Department of Farm Machinery and Power Engineering, AEC&RI, TNAU, Kumulur, India.

^c Department of Physical Science and Information Technology, AEC&RI, TNAU, Coimbatore, India.

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: <https://doi.org/10.9734/ajsspn/2024/v10i2313>

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/116349>

Review Article

Received: 29/02/2024

Accepted: 03/05/2024

Published: 28/05/2024

ABSTRACT

Puddling is a crucial step in rice cultivation, extensively practiced by farmers in Asia for its role in softening soil, aiding in transplanting, and enhancing water and nutrient management. However, the alteration of soil properties by puddling raises concerns about its long-term sustainability. This comprehensive review systematically examines the impact of puddling on soil parameters such as soil texture, bulk density, penetration resistance, hydraulic conductivity, puddling index, and percolation rate. By synthesizing existing literature, the review aims to inform sustainable agricultural practices and effective soil management strategies amidst escalating global concerns. The complexities of puddling's influence on soil structure underscore the need to consider variables like soil texture and aggregate stability. Sustainable practices such as organic manure application

*Corresponding author: Email: thambidurais@tnau.ac.in;

Cite as: Priyadharshini, B., Thambidurai, S., Padmanathan, P., Kamaraj P, Ganapati, P. S., & Kavitha, R. (2024). Assessing the Influence of Soil Physical Properties on the Puddling Quality: A Comprehensive Review. *Asian Journal of Soil Science and Plant Nutrition*, 10(2), 559–574. <https://doi.org/10.9734/ajsspn/2024/v10i2313>

offer potential solutions to address puddling-induced compaction, thereby enhancing soil quality and rice production efficiency. Optimizing tillage methods and improving hydraulic conductivity are essential components of effective soil management strategies for sustainable rice cultivation. Additionally, assessing puddling quality through indices like the puddling index and optimizing percolation rates are vital steps toward improving water management and overall productivity in rice farming.

Keywords: Hydraulic conductivity; penetration resistance; percolation rate; puddling; puddling index; bulk density; soil texture.

1. INTRODUCTION

Rice (*Oryza sativa*) stands as a cornerstone of sustenance in Asian countries, serving as a staple food source for millions, particularly small-scale farmers cultivating vast expanses of land. The Government of India (GoI) estimates the rice production for the fiscal year 2022-23 to reach a substantial 1308.37 lakh tonnes [74]. Integral to the cultivation of rice is a series of meticulous operations, from land preparation to harvest, each playing a crucial role in creating an optimal environment for crop growth. Among these operations, puddling emerges as a significant step in the cultivation process, involving the churning of soil with water to prepare it for cultivation. Puddling offers advantages such as facilitating transplanting, improving water conservation, reducing soil permeability, and enhancing nutrient availability. Puddling is widely adopted in rice farming for various purposes [2,43]. It serves to soften the

soil in the plough layer, aiding in transplanting or direct seeding, creating a smooth soil surface, maintaining consistent flood water depth for efficient water control, reducing weed growth, promoting the integration of fertilizer and soil in the plough layer, and lowering the percolation rate.

The process of puddling contributes to the formation of a compacted soil layer in rice fields, impacting water infiltration and drainage. This compaction, while reducing water permeability, enhances water retention in the root zone, a critical factor for the initial stages of rice growth, especially during germination and early seedling development. Given the adaptability of rice plants to anaerobic environments, puddling ensures the saturation of soil with water, creating conditions conducive to early growth. However, the sustainability of puddling practices has come under scrutiny due to potential long-term repercussions on essential soil properties.



Fig. 1. Puddling on a wetland [88]

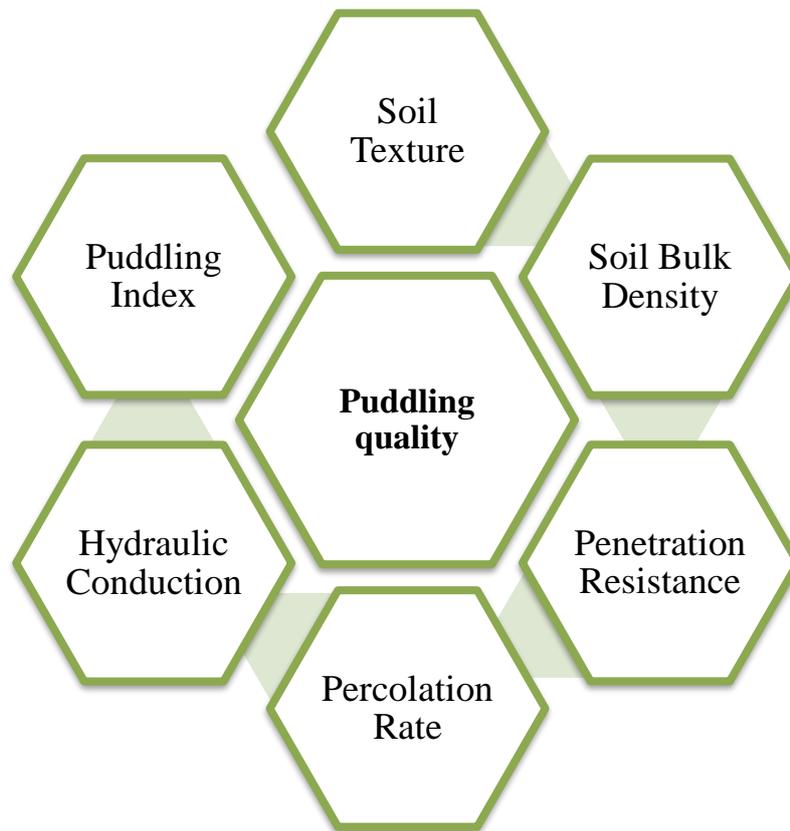


Fig. 2. Parameters influence the puddling quality

Effective soil management is pivotal for sustainable agriculture and environmental health. Puddling, a prevalent practice in rice cultivation, has garnered attention due to its implications for various soil characteristics. While the primary objective of puddling is to enhance water retention and suppress weed growth, questions about its impact on crucial soil properties have surfaced. This comprehensive review undertakes a detailed exploration of the influence of puddling on a range of soil properties. These include, but are not limited to, soil texture, bulk density, penetration resistance, hydraulic conductivity, puddling index, and percolation rate. Through an exhaustive examination of these parameters, we aim to offer a nuanced comprehension of the intricate interactions between puddling practices and soil health.

As global concerns regarding sustainable agriculture and environmental impact continue to escalate, a meticulous analysis of how puddling affects key soil properties becomes imperative. This review adopts a systematic approach, synthesizing information from existing literature and research findings to explain the complex

relationships between puddling practices and various soil properties. By acquiring a profound understanding, our objective is to contribute insights that inform the development of sustainable agricultural practices and effective soil management strategies. This endeavor holds promise in addressing the evolving challenges in rice cultivation while promoting environmentally responsible approaches for future agricultural endeavors.

2. PUDDLER

The Cage wheels, utilized with both two-wheel and four-wheel tractors, steel cage wheels enhance soil puddling and facilitate weed burial by operating under conditions of high wheel slip. This method can be complemented by the attachment of a rotavator or the trailing of a leveling board to further disturb the soil and cover weeds. The hydro-tillers, machines employ a powered rotor to puddle the soil while also burying weeds and residues. Hydro-tillers, which are propelled by an engine-driven rotor, feature a platform equipped with airtight floats, allowing them to operate exclusively in flooded fields.

Transportation of hydro tillers to and from fields can present challenges; however, some models are equipped with wheels attached outside the rotor to facilitate movement. The pulverizing roller (Fig. 3) serves as an accessory for commercially accessible tine cultivators, offering versatility for both puddling and preparing dry seed beds. Comprising six pulverizing members crafted from MS steel flats, these members traverse through slots within star wheels. The attachment of the roller to the cultivator is facilitated by two links equipped with bearing housing on one end and tensile springs on the other. A rotavator is designed to efficiently prepare seedbeds in a single operation,

accommodating both dry and wetland conditions. Its components typically include a frame, a rotary shaft equipped with blades, and a power transmission system connecting the gearbox to the shaft. The Tractor-Mounted Puddlers, similar to a rotavator but distinct in their design, tractor-mounted puddlers are equipped with less robust structures, featuring smaller drums and shoes. They tend to be wider than standard rotavators and can be operated in both wet and dry soil conditions, although they are most effective in fields with standing water. These puddlers are designed to leave the field surface level and yield optimal results when guided by laser technology [28].



Fig. 3. Pulverizing roller [28]



Fig. 4. Rotavator [28]

3. SOIL PROPERTIES

3.1 Soil Texture

The influence of puddling over the surface of soil structure relies on factors such as the texture of the soil and aggregate stability. Aggregate stability, shaped along the elements like clay fraction quantity and type, organic matter, hydrous oxides, interparticle bond formation, and soil solution electrolyte concentration, plays a crucial role. While puddling generally has an adverse impact on soil structure for upland crops, it is noteworthy that rice cultivation may, in certain instances, improve subsoil structure. Over extended periods of repeated puddling, soils undergo notable structural transformations, with the specific changes varying based on soil texture. Soils that undergo puddling demonstrate shrinkage and form weakened structures, which are marked by decreased amounts of water-stable aggregates when they dry [36]. In an assessment conducted on changes in soil texture within the puddle layer resulting from soil particle redistribution during settling post-puddling. The evaluation was based on collected samples, and the particle size distribution within the puddled layer at different depths was determined using the pipette and sieving method [46]. The bulk density may increase over time, even in submerged soil, due to particle settling. Soil particle settling and consolidation can occur through the deflocculation of dispersed clay, influenced by factors such as soil texture, type of clay, and the strong concentrations of the solution of the soil [78]. The conservation of soil during agricultural machinery operations is primarily subjected to organic content, texture of the soil, and soil-water content [8,57]. The studies state that variations in soil texture induced by tillage practices may also impact soil moisture retention properties [51].

The impact of puddling on the water transmission characteristics of soil is contingent upon various factors, including soil texture, type of clay, stability of aggregates in water, intensity of puddling, and closeness of the water table and the surface of the soil [76]. The infiltration rate is influenced by soil texture and structure, with higher rates associated with larger soil particles and more dispersed structures [59]. The water percolation rate can decrease by about 92%, relying on parameters such as soil texture, puddling depth, and intensity [72]. The effects on roots may vary based on soil texture and bulk density. Pore-size distribution, influenced by

texture, plays a significant role in influencing root growth and the distribution of total porosity [45]. In soils with lower water potentials (more negative), puddled soils consistently exhibit higher water retention capacity compared to non-puddled soils. This variation is dependent on soil texture and initial aggregation [23,25,26,30, 41,86, 91,93].

3.2 Bulk Density

Soil bulk density serves as a crucial indicator for monitoring alterations in soil structure and water retention capacity [11]. Bulk density is considered a vital soil physical parameter widely employed for assessing soil compactness. Its values are subject to fluctuations based on both management practices and inherent soil attributes. Due to its reliance on inherent soil properties, the utility of bulk density measurements is constrained when evaluating the impact of soil management on compactness, particularly when comparing soils with diverse inherent characteristics [42]. No-till practices result in higher bulk density at the surface compared to tilled soil [14]. It is observed that the bulk density was higher at the 0–7.5 cm soil depth under no-till compared to conventional tillage [50]. The reduction in bulk density through puddling aligns with findings from earlier researchers. Puddling a high bulk density soil was observed to lower bulk density by fostering an open soil structure [21].

The puddling reduces the bulk density of moisture-less and dense lowland soils next to re-suspending soil particles that are packed together [24]. However, in soils with a well-aggregated, open structure, puddling tends to increase bulk density. The alteration in bulk density due to puddling relies on the status of soil initial aggregation. Transitioning from an well-aggregated open structure to a closely packed parallel-oriented structure increases bulk density, and vice versa [13]. The bulk density of the surface layer of soil under conventional tillage was higher than in soil from zero-till plots [27]. This difference may be attributed to the higher saturation percent observed in zero-till and minimum tillage compared to conventional tillage. The decreased bulk density of no-till plots is attributed to elevated organic matter content and root concentration [67].

The puddling led to a 30% reduction in the bulk density of two sets of soils in the upper 0.1m layer [77]. However, variation in bulk density

between puddled and non-puddled soil diminished over the period. Additionally, puddling notably reduces bulk density in the top layer of soil (0.2m). Mohanty found that in puddled soil, soil bulk density significantly increased from transplanting to harvest. Puddling, particularly in layers 0 - 50mm, 50 - 100mm, and 100 -150mm, led to a notable reduction in bulk density (Mg m^{-3}), with a more pronounced decrease associated with higher puddling intensity [56]. Sharma and Datta observed that puddling induces a notable decline in the bulk density of the surface layer of lowland clay from 0.83 to 0.53 Mg m^{-3} and clay loam from 1.16 to 0.81 Mg m^{-3} . This reduction is attributed to the initial breakdown of soil aggregates, resulting in the loss of inter-aggregate transmission pores. Additionally, there is an observed rise in inter-domain pores and inter-micro aggregates. The study underscores the impact of puddling on soil structure and provides insight into the mechanisms contributing to the observed changes in bulk density [78]. An experiment revealed a significant decrease in soil bulk density, particularly at a depth of 30 cm, when employing moldboard ploughing in conjunction with direct seeding [12]. The soil bulk density values, ranging from 1.6 - 1.8 cm^{-3} at a depth of 20 - 25 cm, contrasted with 1.4 - 1.5 g cm^{-3} at the surface layer (0 to 12 cm), suggesting the presence of a plough pan in these soils [5]. But Mathew *et al.* state that the Surface of soil in no-till and conventional-till handling exhibited lesser bulk density than the sub-surface of the soil, with no serious variation observed between the two methods of tillage [54]. The experiment of Dewanti and Mandang also gives a notable reduction in bulk density after the puddling. The initial dry bulk density of the mud layer with stage-1 puddle method treatment was 0.87 g cm^{-3} , reducing post-tillage to 0.71 g cm^{-3} . Similarly, the mud layer treated with the stage-2 puddling method exhibited an initial density of 0.98 g cm^{-3} , decreasing post-tillage to 0.86 g cm^{-3} [32].

In a study, it was observed that both the type of puddler and the intensity of puddling exerted significant influences on bulk density hydraulic conductivity. The findings indicated that hydraulic conductivity exhibited a decreasing rate at higher soil bulk densities. Puddling was found to elevate the bulk density of the soil, consequently leading to a reduction in hydraulic conductivity [17]. These observations underscore the interconnected relationship between puddling practices, bulk density changes, and hydraulic conductivity in soil. Mousavi highlighted the

significance of puddling intensity on soil bulk density, indicating a notable impact of varying puddling levels on this soil property [58].

A study assessed the bulk density of puddled soil at 30 and 60 Days After Puddling (DAP) in two experiments. Puddled soil consistently exhibited higher bulk density compared to unpuddled soil across all treatments. Increasing puddling intensity, particularly with three passes, significantly increased bulk density for the rotary puddler and showed a non-significant increase for the peg-type puddler and cultivator. The study also noted a correlation between the dispersion of soil particles and bulk density, with higher puddling indices corresponding to increased bulk density. Although there was a noteworthy increase in bulk density was observed only with the rotary puddler, possibly due to its higher puddling index. Bulk density exhibited an increase over time, attributed to soil shrinkage at lower moisture content. Notably, the treatment involving the rotary puddler with three passes significantly reduced both bulk density and hydraulic conductivity, yet resulted in reduced root growth and subsequently lower yields compared to other treatments [18]. In a field experiment, there was a reduction in the bulk density in a clay loam (1.16 - 0.81 tm^{-3}). The observed lower rice yields in dense soils are attributed to potential seedling root injuries during transplanting and the hindrance of root growth by the strong soil structure [77]. The study also highlights a negative correlation between bulk density, shear strength, and the growth and grain yield of transplanted rice. This underscores the importance of soil physical properties in influencing rice productivity, emphasizing the need for soil management practices that mitigate soil density and enhance root development for improved crop yields.

There was a negative correlation between Root-Length Density (RLD) at the 0- to 0.10m depth during harvest and soil bulk density at transplanting [79,80]. In an experiment, it was analyzed that low-puddled soil exhibited higher bulk density, possibly attributed to a faster rate of settling [56]. According to Akhtar *et al.*, soil bulk density serves as a straightforward indicator of soil compaction [6]. Any observed rise in bulk density at specific depths with varying tillage practices is considered direct evidence of soil compaction. Also, according to Alongo and Kombele, bulk density functions as an indicator of soil compaction and provides insight into the quantity of void space within the soil [7]. Soil

moisture, soil type, texture, and bulk density are key factors influencing the size and percentage of clods [52]. Bulk density demonstrates a linear increase over time across all treatments, potentially attributed to soil settlement and shrinkage at lower moisture contents [15]. In the experiment conducted by Kukal and Aggarwal, the bulk density of the 14 - 20 cm soil zone, observed after each rice season, exhibited a consistent increase over the period [49]. The mean bulk density in the 14 - 20 cm soil layers notably rose from 1.53 Mg m⁻³ in 1994 to 1.66 Mg m⁻³ in 1995 and further to 1.70 Mg m⁻³ in 1996. Bulk density in the 14 - 20 cm zone increased annually, reaching 1.70 Mg m⁻³ in 1996. Shallow-puddled soils showed a smaller increase than normal-puddled ones, with a significant difference. Puddling at normal depth led to a compact layer persisting despite subsequent cultivation. According to Lal, the surface layer of puddled treatments exhibited elevated bulk density at harvest compared to the no-till plots [51]. It was found that puddling, which elevated bulk density, led to increased shear strength and a notable reduction in infiltration rate [73]. As per observation, post-harvest, soil bulk density in the 0 -7.5 cm layer was 510% higher on compacted plots compared to puddled plots [22]. In the 7.5 - 15 cm layer, bulk density on puddled plots equaled that of compacted plots due to particle settling and shrinkage. Bulk density variations were noted with uncontrolled factors, including soil type and depth. Numerous studies report an increase in soil bulk density during the transition from Conventional Tillage to No Tillage [37,39]. In a study, the bulk density of the soil initially rose with zero tillage compared to the traditional method of Tillage for the initial two years. However, over four years, it leveled off and eventually decreased under No-Tillage, likely due to enhanced soil structural stability [89].

Puddling-induced compaction was partially alleviated by organic manure. Organic manure, particularly green manuring, exhibited a greater buffering effect on changes in soil bulk density compared to farmyard manure [3].

3.3 Penetration Resistance

Soil penetration resistance is a critical parameter for assessing soil structure quality and overall health, serving as a vital indicator of the soil's ability to support agricultural productivity and plant growth. It is typically measured in megapascals (MPa) and reflects the resistance of soil to being penetrated by an object or root. The measurement of soil penetration resistance helps in understanding the compactness and consolidation of soil, factors that significantly affect root penetration, water infiltration, and, consequently, plant growth.

Soil penetration resistance, measured in MPa, is a key indicator of soil structure quality. Understanding and assessing this factor is crucial for evaluating overall soil health and productivity [42]. According to Saroch and Thakur, in puddled soil, penetration resistance notably increased from transplanting to harvest. In unpuddled soil, penetration resistance increased mainly in the surface 0-7 cm layer. Puddling is linked to increased bulk density and penetrometer resistance [73]. Valera *et al.* found that mean dry bulk density at 30 cm depth remained unaffected by the number of passes or tractor type. Although successive passes significantly altered soil penetration resistance from the first pass onward, no statistically significant differences were noted after subsequent passes. Notably, alterations in penetration resistance were observed in the top 10 cm of soil [87].

Table 1. Bulk density and its effect

Author	Bulk Density (Mg m ⁻³)	Puddling Effect
Bodman and Rubin, 1948	0.83 - 1.16	Puddling reduces the bulk density of dense lowland soils
Sharma and Datta, [78]	0.53 - 1.16	Puddling leads to a reduction in bulk density
Kukal and Aggarwal, [49]	1.53 - 1.70	Consistent increase in bulk density observed over years
Mohanty, [56]	0.87 - 1.16	Soil bulk density increases from transplanting to harvest under puddling
Asenso et al., [12]	1.4 - 1.8	Significant decrease in bulk density observed with moldboard ploughing and direct seeding
Dewanti and Mandang, [32]	0.71 - 0.98	Notable reduction in bulk density after puddling

Low penetration resistance hinders farm machinery use, as modern equipment with a ground pressure of 50 kPa may encounter difficulties due to high rolling resistance and slip. Compaction, sand addition, and drainage contribute to increased penetration resistance and shear strength. Soil penetration resistance rises consistently with depth [77]. The variations in cone penetrometer resistance profiles at different depths, one day before transplanting, under puddling and compaction treatments. In compaction, penetrometer resistance peaked at 5 cm, while in puddling, a gradual increase was noted, reaching its maximum at 12 cm. Compaction primarily affected the 0–11 cm layer, with recultivation loosening the top 3–4 cm. Puddling, however, disrupted soil aggregates, capillary pores, and dispersed clay particles, reducing soil strength. Settlement of heavier particles occurred in the puddled layer, confirmed by the content of large particles (greater than 2 mm) in the 0–5 cm layer. Water flow and tractor wheel compaction likely contributed to increased PR in the 10–13 cm layer after puddling treatments [38]. According to Rautaray, the primary objectives of puddling are to minimize deep water percolation, decompose weeds, and ease the transplanting of rice seedlings by softening the soil. However, puddling results in soil compaction, raising both bulk density and soil penetration resistance [66]. McCoy and Cardina assert that short-term no-till practices lead to increased penetration resistance and a reduced rate of oxygen diffusion in the soil [55]. Yao conducted a three-year experiment on rice straw incorporation and tillage depth effects on soil properties. Shallow tillage increases penetration resistance more than deep tillage, affecting root growth. Rice straw incorporation reduced sinkage resistance, influenced soil structure regeneration, and correlated with soil organic C concentration [92].

There was a negative correlation between grain yield and soil bulk density, as well as soil penetration resistance. In tillage experiments, minimum tillage resulted in significantly higher grain yield, attributed to increased plant height, panicle length, and root length density, along with reduced soil penetration resistance [79]. Shallow and deep puddling also led to substantial yield increases, emphasizing the importance of mitigating soil penetration resistance for improved rice production. Increased penetration resistance to 1500 kPa may reduce crop root growth by 20% to 75% [19]. However, the limit of penetration resistance

varies with the crop type [20]. Penetration resistance measurements are lower with higher soil water content [85]. As a result, sinkage resistance and penetration resistance exhibit a negative correlation with soil organic carbon (SOC) concentration.

3.4 Hydraulic Conductivity

Wet tillage in rice, specifically puddling, diminishes hydraulic conductivity (K_s) by disrupting soil aggregates and reducing non-capillary pores. This process, as noted by Bodman and Rubin, hinders the rapid transmission of water in the soil [24]. It is observed that an increase in puddling intensity notably augmented the depth of the puddle and concurrently reduced the saturated hydraulic conductivity (K_s) of the puddled layer [81,82]. Puddling-induced reduction in hydraulic conductivity is likely attributed to the destruction of soil aggregates and the decrease in non-capillary pores, (Sharma and Dutta, Mambaniet al., [53,76]. Puddling diminishes hydraulic conductivity by elevating topsoil clay content [51]. An increase in puddling intensity significantly augmented the depth of the puddle and concurrently reduced the saturated hydraulic conductivity of the puddled layer [81]. The reduction in the value of hydraulic conductivity may be attributed to the elimination of transmission pores resulting from intense puddling with a power tiller and a puddler [16]. Puddled soil, characterized by closely packed parallel particles, diminishes hydraulic conductivity (K_s) and percolation rate, as highlighted [31]. Puddling led to a significant reduction in hydraulic conductivity, decreasing it from 20.5 to 1.6 mm⁻¹ in sandy clay loam [60].

Puddling not only diminishes percolation losses by reduction in soil hydraulic conductivity but also aids in control of weed and creates a medium soft for effective transplanting of rice seedlings, as discussed, Sharma and Datta, and [31,47,78]. The hydraulic conductivity of compacted soil cores exhibited a significant decrease as bulk density rose from 1.5 - 2.0 Mg m⁻³ [61]. Saloke et al. observed a decrease in hydraulic conductivity with an increasing number of passes of a rotavator at all speeds. The decrease in hydraulic conductivity is attributed to the sealing of pore spaces by finer particles in the hardpan at the top of the [69]. Behera experimented, finding the minimum hydraulic conductivity at 30 Days After Planting (DAP) in Peg-type puddler with two passes (0.257 mm hr

¹), significantly lower than Peg-type puddler with one pass (0.315 mm hr⁻¹) but comparable to rotary puddler of one pass (0.270 mm hr⁻¹). No substantial variation was observed at 60 DAP. Hydraulic conductivity reduction in puddled soil, attributed to the clogging of pore channels by settled particles, was evident in all treatments. The correlation revealed that as bulk density increased, hydraulic conductivity decreased, with a lower rate of decrease at higher bulk density [17].

The field monitoring of the bulk density of the soil and penetrometer resistance. Saturated hydraulic conductivity was assessed using a constant head permeameter on 100cm³ cores. Inconsistent trends were observed in saturated hydraulic conductivity concerning tillage or nitrogen treatment. Although variable, hydraulic conductivity generally remained high, with variations expected due to measurements on small cores where cracks near cylinder walls could influence water flux. Puddled treatment surfaces exhibited higher bulk density and lower hydraulic conductivity at harvest compared to no-till plots [51]. An experiment by Kukal and Aggarwal, observed a decrease in hydraulic conductivity of the puddled layer with increased puddling intensity, ranging from 0.064 cm h⁻¹ with medium-puddling to 0.009 cm h⁻¹ with high-puddling [48]. Simultaneously, the hydraulic gradient between puddled and unpuddled layers increased with puddling intensity. The hydraulic conductivity of the puddled layer, corresponding to a puddle water depth (PWD) of 7 cm, was calculated using Darcy's Law. In high-puddled plots, the reduced hydraulic conductivity of the puddled layer led to water accumulation, contributing to under-bund percolation. Puddling resulted in a 76% reduction in hydraulic conductivity with medium-puddling and an 86% decrease with high-puddling compared to the same layer in puddled plots. The primary objective of puddling rice soils is to reduce hydraulic conductivity [71]. Hobbs *et al.* determined that puddling significantly decreased hydraulic conductivity throughout the rice season [40]. In direct-seeded plots, it was 5.68 and 3.25 times higher at the surface and subsurface layers compared to transplanting. At 20 Days After Transplanting/Days After Sowing (DAT/DAS) and at harvest, Singh *et al.* found that hydraulic conductivity was 2.4 and 1.2 times higher in the surface layer compared to the subsurface layer. Puddling induces alterations in soil physical conditions, diminishing hydraulic conductivity and infiltration rate for facilitated submergence. This

practice aids in preventing nutrient loss through leaching, and weed control, and enhances nutrient availability through the creation of a reduced soil layer and other chemical property changes [63]. Kalita *et al.* studied that the distribution of water-stable aggregates (WSA) increased with decreasing size, and surface soil's saturated hydraulic conductivity during rice harvest significantly decreased with conventional tillage. Puddling using a helical blade puddler or power tiller, however, further reduced hydraulic conductivity compared to traditional practices [42].

4. PUDDLING PARAMETERS

4.1 Puddling Index

The puddling index is a crucial parameter used to assess the effectiveness of soil puddling in rice cultivation. After the final puddling operation, a 250 ml soil sample is collected in a graduated glass cylinder and allowed to settle for 48 hours. The volume of the settled soil sample (Vs) is then measured, along with the initial volume (V) before settlement. The puddling index is calculated using the formula:

$$\text{Puddling Index} = \frac{V_s}{V} \times 100$$

One notable limitation of this index is its dependency on the depth of water standing in the field. Despite this drawback, studies have shown a significant increase in the puddling index of rice soils when mechanical puddling implements are employed, surpassing traditional farming practices. The puddling index, uniformity index, and softness index measurements as indicators to assess the quality of puddling [32]. Behera *et al.* observed a noteworthy rise in the puddling index with increased puddling levels [18]. Dhiman *et al.* observed a greater decrease in bulk density of surface soil (0-15cm) compared to sub-surface soil conditions (15-30cm), attributing it to a combination of high puddling index and puddling depth. However, significant bulk density augmentation occurred solely with the rotary puddler, likely attributed to its higher puddling index [33]. In an experiment, increasing the number of passes from single to double did not significantly affect puddling quality. The power tiller-operated rotary tool achieved the highest puddling index (61.18%). The rotavator, with a slightly lower puddling index (58.29%) due to its larger width, was deemed the best overall among the puddling techniques studied [64].

Verma and Dewangan reported that the highest puddling index value was observed when using a tractor-attached cage wheel and rotavator in their experiment [88]. Mechanical puddling implements led to a significant increase in the puddling index (%) of rice soils compared to traditional farmers' practices [42].

A study on the puddling index revealed significant increases with higher puddling levels across various equipment. Rotary puddler exhibited the highest index, notably at three passes. Apeg-type puddler, showed an increased puddling index in the second year, possibly due to well-prepared initial field conditions. The study suggests that close peg spacing contributes to a higher puddling index in peg-type puddlers compared to cultivators. Moreover, while there was a considerable increase in the puddling index with higher puddling levels, bulk density increased significantly only with the rotary puddler, possibly due to its higher puddling index, causing the destruction of macro pores [18]. In the series of experiments, it was found that Treatment P2- Peg type puddler with two passes demonstrated a significantly higher puddling index (30.13%) compared to P1- peg type puddler with one pass (19.40%) and R1- rotary puddler with one pass (24.60%). Puddling involves compression and shear deformations, with rotary puddler's shear stress disintegrating soil particles effectively. The angular blade orientation in rotary puddlers enhances churning, aligning with the observed increase in the puddling index [17]. This supports findings by Salokhe *et al.* and Behera *et al.*, confirming that the increased level of puddling intensifies soil manipulation, resulting in a higher puddling index [18,70]. It was found that the rotavator and pulverizing roller attachment were effective in developing a puddle bed based on the puddling index and percolation rate [68]. The pulverizing roller attachment exhibited the deepest puddle bed with the lowest development cost, although the cultivator- planker showed a slightly higher yield compared to the rotavator. The pre-puddling tillage intensity did not affect the puddling index, but increasing puddling intensity significantly raised it. The index was unaffected by clay content in surface soil layers, suggesting it is a distinct indicator of clay content, especially in sandy loam soils [49].

4.2 Percolation Rate

Percolation rate, a critical aspect of soil hydrology, refers to the rate at which water

moves downward through the soil profile, influencing water availability for plant uptake and groundwater recharge. Understanding percolation rates is particularly crucial in agricultural contexts, such as rice production, where water management plays a significant role in crop productivity and resource conservation.

In rice production, coarse-textured soils experience significant water and nutrient losses through deep percolation. Enhancing productivity involves minimizing water percolation and nitrogen leaching [44]. About 75% of water applied to rice crops is lost through deep percolation during field submergence. Cultivating rice under puddled conditions is employed to minimize percolation losses, aiming to enhance water and nutrient use efficiency in plant cultivation [83]. According to Patel and Aimrun *et al.*, puddling reduces percolation, leading to prolonged standing water in the field [4,62]. This, in turn, decreases the irrigation requirement. The reduction in water loss through percolation is attributed to the structureless soil and the formation of a tillage pan [29,90].

Soil compaction emerges as a cost-effective alternative to puddling, reducing percolation losses and rice water requirements. Achieved through heavy roller passes near the lower soil plastic limit, compaction allows mechanization in wetland rice cultivation, overcoming the challenges of puddling, particularly on medium and coarse-textured soils [35]. Arora emphasized that alterations in soil bulk density and saturated hydraulic conductivity, driven by variations in puddling intensity, play a pivotal role in influencing percolation rate and water usage during the puddling process. The reduced water requirement in the compaction treatment is attributed to lower permeability, leading to decreased percolation [10]. Compaction interlocks aggregate, minimizing macropore volume and subsequently reducing percolation losses [1]. In an experiment by Anjum, 2019, Water loss through seepage plus percolation was notably higher in unpuddled soils compared to puddled soils, and it increased with the intensity of puddling, ranging from 976 mm to 1098.6 mm [9]. The infiltration rate of soil significantly decreased with increasing puddling intensity in furrows. The maximum number of puddling passes in furrows resulted in the highest yield, reaching 653.2 gm⁻² compared to 450.5 gm⁻² under the control treatment. Maximum water productivity (0.5724 kg m⁻³) was achieved with six passes of puddling, while the minimum water

productivity (0.26 kg m^{-3}) was observed in the control treatment. The transitioning from low to medium puddling intensity reduced mean seasonal percolation losses by 78.3 cm in sandy loam and 50.8 cm in silty clay loam soils. Furthermore, increasing puddling intensity from medium to high led to a decrease in mean seasonal percolation losses by 37.9 cm in sandy loam and 39.3 cm in silty clay loam soil [81]. The depth of flooding had contrasting effects on percolation in different soil types. For somewhat porous, non-swelling soils, the percolation increased with greater flooding depth, while low-percolating soils experienced reduced permeability. Tabbal *et al.* found a decrease in percolation rate from 20 mm per day under 2 - 5 cm puddling water depth (PWD) to 9 mm per day in the continuously saturated regime (PWD = 0 cm) in clay loam soil [84]. In contrast, a study reported only a slight increase in percolation loss with increasing water depth [34].

In a study, there was a decrease in percolation rate (PR) in sandy loam soil from 14 mm/day with low-puddling (one pass of plowing followed by planking) to 10 mm/day with high-puddling (four passes of plowing followed by one planking). The extent of percolation loss reduction is linked to puddling intensity, with high intensity contributing to hardpan development and adverse effects on subsequent wheat crops' growth and yield [3]. The nonlinear reduction in water flux through soils with increasing puddling depth in a column study that puddling significantly decreased the water percolation rate by up to 92%, depending on puddling depth, intensity, and soil texture [75]. Soils with higher organic matter exhibited a more pronounced reduction in percolation rate. A puddling depth of 10 cm at high intensity proved most effective in limiting the settling of suspended particles and water percolation [72].

The study employed a method to assess the creation of an impervious layer using infiltration as an indicator. A 15 cm diameter pipe filled with water was used, and the water level was recorded at 3-hour intervals to analyze the relationship between infiltration rate and duration. Analysis of variance for sandy loam soil puddling index revealed significance at the 1% level, with the power tiller-operated rotary tool exhibiting the highest puddling index [28,64,65]. The number of passes did not significantly affect the puddling index. Increasing passes led to a higher puddling index and reduced infiltration rate, with the power tiller, operated rotary tiller showing the highest puddling index and lowest infiltration rate. Rotavator puddling was second, covering more

area than the power tiller. In conclusion, rotavator puddling is deemed suitable for sandy loam soil among the tested techniques.

The decline in percolation rate (PR) over time in both medium and high-puddling experiments. Increased depth of ponding water correlated with a higher percolation rate. Infiltration rings recorded percolation rate values of 1.8%, 38.8%, and 42.1% lower than those in whole plots, indicating under-bund losses. The seepage ratio increased with intensified puddling, highlighting the direct relationship between under-bund percolation and puddling intensity. Medium-puddling significantly reduced mean PR by 55%, 54%, and 58% in 1994, 1995, and 1996, respectively, compared to unpuddled plots. High puddling did not further decrease the percolation rate significantly, despite a higher sediment density. In unpuddled soils, PR remained relatively constant, while in puddled soils, it decreased over time, demonstrating the impact of settling finer soil particles on surface permeability [48].

In an observation a 14-16% decrease in percolation losses with increased puddling intensity, leading to a 10-25% reduction in irrigation water requirement. Puddling depth did not impact percolation losses or irrigation water applied [49]. Mohanty found that puddling, on average, reduced seepage plus percolation, with the extent of reduction influenced by puddling intensity. Coarse-textured and organically rich soils responded more to puddling in reducing percolation losses [56]. Sharma and Datta, reported that there remains a necessity to formulate a comprehensive puddling index aligning with the dual goals of achieving soil softness for easy transplanting and minimizing percolation rates for water and nutrient conservation [78]. An integrated assessment incorporating bulk density and percolation rate is recommended. Exploring the alteration in the ratio of silt plus clay dispersed in water to the actual silt plus clay in the soil, pre- and post-puddling, may also serve as a viable index for evaluating puddling effectiveness. The puddling serves multiple purposes, such as weed suppression, minimizing water percolation through the formation of a hardpan, and facilitating energy-intensive rice transplanting by preparing beds [51].

5. CONCLUSION

In Conclusion, puddling's impact on soil structure is complex, influenced by factors like soil texture

and rice cultivation methods. While it can improve sub-soil for rice, it compromises structure for upland crops, leading to shrinkage and weakened structures. Bulk density may increase, affecting water transmission and root growth. Organic manure can help mitigate compaction. Soil penetration resistance affects soil health and productivity, highlighting the need for effective management practices. Wet tillage practices like puddling reduce hydraulic conductivity, impacting water movement and nutrient availability. Puddling quality assessments are crucial for sustainable rice farming. Percolation rates in rice cultivation are influenced by puddling intensity and soil properties, informing water management strategies.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Acharya CL, Sood MC. Effect of tillage methods on soil physical properties and water expense of rice on an acidic Alfisol. *Journal of the Indian Society of Soil Science*. 1992;40(3):409-414.
2. Adachi K. Percolation and seepage. *Advanced Paddy Field Engineering*. 1992; 71-88.
3. Aggarwal GC, Sidhu AS, Sekhon NK, Sandhu KS+, Sur HS. Puddling and N management effects on crop response in a rice-wheat cropping system. *Soil and Tillage Research*. 1995;36(3-4):129-139.
4. Aimrun W, Amin MSM, Gholizadeh A. Spatial variability of irrigation water percolation rates and its relation to rice productivity. *American Journal of Applied Sciences*. 2010;7(1):51-55.
5. Akhtar MS, Qureshi S. Soil hydraulic properties and rice root development as influenced by tillage. *Pakistan J. Biol. Sci*. 1999;2(4):1245-1251.
6. Akhtar MS, Nabi G, Mahmood-ul-Hassan M. Does no-till wheat sowing in a rice-wheat cropping sequence cause surface-soil compaction? *Eurasian Soil Science*. 2008;41:1205-1212.
7. Alongo S, Kombele F. Évolution de la densité apparente et du rapport c/n du sol sous les variétés exotiques et locale de manioc dans les conditions naturelles de Kisangani (RD Congo). *Annales de l'Institut Facultaires des Sciences Agronomiques de Yangambi*. 2009;1:197-214.
8. Andrade-Sánchez P, Upadhyaya SK, Jenkins BM. Development, construction, and field evaluation of a soil compaction profile sensor. *Transactions of the ASABE*. 2007;50(3):719-725.
9. Anjum A, Zafar U, Awais HM, Shakoor A. Impact of puddling on water productivity of rice under raised bed technology. *J. Glob. Innov. Agric. Soc. Sci*. 2019;7(3):129-134.
10. Arora VK, Gajri PR, Uppal HS. Puddling, irrigation, and transplanting-time effects on productivity of rice-wheat system on a sandy loam soil of Punjab, India. *Soil and Tillage Research*. 2006;85(1-2):212-220.
11. Arshad MA, Franzluebbers AJ, Azooz RH. Components of surface soil structure under conventional and no-tillage in northwestern Canada. *Soil and Tillage Research*. 1999; 53(1):41-47.
12. Asenso E, Wang Z, Kai T, Li J, Hu L. Effects of puddling types and rice establishment methods on soil characteristics and productivity of rice in Southern China. *Applied and Environmental Soil Science*. 2022;2022.
13. Aylmore LAG, Quirk JP. The structural status of clay systems. In *Clays and Clay Minerals*. Pergamon. 1962;104-130
14. Azooz RH, Arshad MA, Franzluebbers AJ. Pore size distribution and hydraulic conductivity affected by tillage in Northwestern Canada. *Soil Science Society of America Journal*. 1996;60(4): 1197-1201.
15. Bajpai RK, Tripathi RP. Evaluation of non-puddling under shallow water tables and alternative tillage methods on soil and crop parameters in a rice-wheat system in Uttar Pradesh. *Soil and Tillage Research*. 2000; 55(1-2):99-106.
16. Barua NG, Barkakaty PK, Barua DC, Kalita J. Effect of tillage on physical properties of soil under lowland conditions and crop performance in rice-toria system. *Indian Journal of Dryland Agricultural Research and Development*. 2007;22(1):52-56.
17. Behera BK. Effect of puddling on puddled soil characteristics and performance of self-propelled transplanter in rice crop. *Agricultural Engineering International: CIGR Journal*; 2009.
18. Behera BK, Varshney BP, Swain S. Effect of puddling on physical properties of soil and rice yield. *Agricultural Mechanization*

- in Asia Africa and Latin America. 2007; 38(1):23.
19. Bengough AG. Modelling rooting depth and soil strength in a drying soil profile. *Journal of Theoretical Biology*. 1997; 186(3):327-338.
 20. Bengough AG, McKenzie BM, Hallett PD, Valentine TA. Root elongation, water stress, and mechanical impedance: A review of limiting stresses and beneficial root tip traits. *Journal of Experimental Botany*. 2011;62(1):59-68.
 21. Bhagat RM, Sharma PK, Verma TS. Tillage and residue management effects on soil physical properties and rice yield in northwestern Himalayan soils. *Soil and Tillage Research*. 1994;29(4):323-334.
 22. Blake GR, Hartge KH, Klute A. Methods of soil analysis: Physical and mineralogical methods. *Agronomy Monograph*. 1986;9: 363-375.
 23. Bodman GB, Day PR. Freezing points of a group of California soils and their extracted clays. *Soil Science*. 1943;55(3):225-246.
 24. Bodman GB, Rubin J. Soil puddling. *Soil Science Society of America Journal*. 1949; 13(C):27-36.
 25. Buehrer TF, Rose MS. Studies in soil structure V. Bound water in normal and puddled soils. College of Agriculture, University of Arizona (Tucson, AZ); 1943.
 26. Campbell RB. The freezing point of water in puddled and unpuddled soils at different soil moisture tension values; 1951.
 27. Chang C, Lindwall CW. Effects of tillage and crop rotation on physical properties of a loam soil. *Soil and Tillage Research*. 1992;22(3-4):383-389.
 28. Chhina RS. Comparative performance of different puddling equipments. *Int. J. of Agril. Engg*. 2015;8(2):210-214
 29. Choudhury BU, Bouman BAM, Singh AK. Yield and water productivity of rice-wheat on raised beds at New Delhi, India. *Field Crops Research*. 2007;100(2-3):229-239.
 30. Croney D, Coleman JD. Soil structure in relation to soil suction (pF). *Journal of Soil Science*. 1954;5(1):75-84.
 31. Datta SK. Principles and practices of rice production. *Int. Rice Res. Inst*; 1981.
 32. Dewanti AN, Mandang T. Analysis of soil puddling method and the effect to soil physical properties and rice plant growth. In *IOP Conference Series: Earth and Environmental Science*. IOP Publishing. 2022;1038(1):012062.
 33. Dhiman SD, Nandal DP, Om H, Sharma TR, Rani V. Performance of puddling equipment and self-propelled rice transplanter in crop establishment and grain yield of rice (*Oryza sativa*). *Indian Journal of Agronomy*. 2001;46(1):64-67.
 34. Ferguson JA. Effect of flood depth on rice yield and water balance. *Arkansas Farm Research*. 1970;19(3).
 35. Ghildyal BP. Effects of compaction and puddling on soil physical properties and rice growth. *Soils and Rice*. 1978;316-336.
 36. Greenland DJ. Physical aspects of soil management for rice-based cropping systems. *Soil Physics and Rice*. 1985;1-16.
 37. Gregorich EG, Reynolds WD, Culley JLB, McGovern MA, Curnoe WE. Changes in soil physical properties with depth in a conventionally tilled soil after no-tillage. *Soil and Tillage Research*. 1993;26(4):289-299.
 38. Hemmat A, Taki O. Comparison of compaction and puddling as pre-planting soil preparation for mechanized rice transplanting in very gravelly Calcisols in central Iran. *Soil and Tillage Research*. 2003;70(1):65-72.
 39. Hill RL. Long-term conventional and no-tillage effects on selected soil physical properties. *Soil Science Society of America Journal*. 1990;54(1):161-166.
 40. Hobbs PR, Singh Y, Giri GS, Lauren JG, Duxbury JM. Direct seeding and reduced tillage options in the rice-wheat systems of the Indo-Gangetic Plains of South Asia. by S Pandey, M Mortimer, L Wade, TP Tuong, K Lopez and B. Hardy. *IRRI, Los Baños*. 2002;201-215.
 41. Jamison VC. Changes in air-water relationships due to structural improvement of soils. *Soil Science*. 1953;76(2):143-152.
 42. Kalita J, Ahmed P, Baruah N. Puddling and its effect on soil physical properties and growth of rice and post rice crops: A review. *Journal of Pharmacognosy and Phytochemistry*. 2020;9(4):503-510.
 43. Kaneki R. Reduction of effluent nitrogen and phosphorus from paddy fields. *Paddy and Water Environment*. 2003;1:133-138.
 44. Kar S, Samui RP, Prasad J, Gupta CP, Subramanyam TK. Compaction and tillage depth combinations for water management and rice production in low-retentive permeable soils. *Soil and Tillage Research*. 1986;6(3):211-222.

45. Kar S, Varade SB, Ghildyal BP. Pore size distribution and root growth relations of rice in artificially synthesized soils. *Soil Science*. 1979;128(6):364-368.
46. Kirchhof G, So HB. Soil puddling for rice production under glasshouse conditions—its quantification and effect on soil physical properties. *Soil Research*. 2005;43(5):617-622.
47. Kirchhof G, Priyono S, Utomo WH., Adisarwanto T, Dacanay EV, So HB. The effect of soil puddling on the soil physical properties and the growth of rice and post-rice crops. *Soil and Tillage Research*. 2000;56(1-2):37-50.
48. Kukal SS, Aggarwal GC. Percolation losses of water in relation to puddling intensity and depth in a sandy loam rice (*Oryza sativa*) field. *Agricultural Water Management*. 2002;57(1):49-59.
49. Kukal SS, Aggarwal GC. Puddling depth and intensity effects in rice–wheat system on a sandy loam soil: I. Development of subsurface compaction. *Soil and Tillage Research*. 2003;72(1):1-8.
50. Kumar V, Singh S, Yadav A, Malik RK, Hobbs PR. Studies on the effect of zero tillage in wheat on physico-chemical properties of soil in comparison to conventional tillage. Herbicide resistance management and zero tillage in rice-wheat cropping system. Hisar, India: CCSHAU. 2002;172-176.
51. Lal R. Effects of 6 years of continuous no-till or puddling systems on soil properties and rice (*Oryza sativa*) yield of a loamy soil. *Soil and Tillage Research*. 1986;8:181-200.
52. Lyles L, Woodruff NP. Surface soil cloddiness in relation to soil density at time of tillage. *Soil Science*. 1961;91(3):178-182.
53. Mambani B, Datta, SK, Redulla CA. Land preparation requirements for rainfed rice as affected by climatic water balance and tillage properties of lowland soils. *Soil and Tillage Research*. 1989;14(3):219-230.
54. Mathew RP, Feng Y, Githinji L, Ankumah R, Balkcom KS. Impact of no-tillage and conventional tillage systems on soil microbial communities. *Applied and Environmental Soil Science*; 2012.
55. McCoy EL, Cardina J. Characterizing the structure of undisturbed soils. *Soil Science Society of America Journal*. 1997;61(1):280-286.
56. Mohanty M, Painuli DK, Mandal KG. Effect of puddling intensity on temporal variation in soil physical conditions and yield of rice (*Oryza sativa* L.) in a Vertisol of central India. *Soil and Tillage Research*. 2004;76(2):83-94.
57. Mosaddeghi MR, Hajabbasi MA, Hemmat A, Afyuni M. Soil compactibility as affected by soil moisture content and farmyard manure in central Iran. *Soil and Tillage Research*. 2000;55(1-2):87-97.
58. Mousavi SF, Yousefi-Moghadam S, Mostafazadeh-Fard B, Hemmat A, Yazdani MR. Effect of puddling intensity on physical properties of a silty clay soil under laboratory and field conditions. *Paddy and Water Environment*. 2009;7:45-54.
59. Mufti AI, Khan AS. Performance evaluation of Yanmar paddy transplanter in Pakistan. *Agricultural Mechanization in Asia Africa and Latin America*. 1995;26:31-31.
60. Pande HK. 13. Water management practices and rice cultivation in India. In *Proceedings of a Symposium on Tropical Agriculture Researches*, August, 1975. Tropical Agriculture Research Center, Ministry of Agriculture and Forestry. 1976; 9:231.
61. Patel MS, Singh NT. Changes in bulk density and water intake rate of a coarse textured soil in relation to different levels of compaction. *Journal of the Indian Society of Soil Science*. 1981;29(1):110-112.
62. Patel SV. Weed and water management strategies on the adaptive capacity of rice-wheat system to alleviate weed and moisture stresses in conservation agriculture: A review. *Int. J. Chem. Stud*. 2019;7:1319-1334.
63. Ponnampereuma FN. Physicochemical properties of submerged soils in relation to fertility rice. In *Seminar on the Fertility of Paddy Soils*. Taipei (Taiwan); Jul 1976.
64. Prasanthkumar K, Saravanakumar M, Gunasekar JJ. Water management through puddling techniques. *Journal of Krishi Vigyan*. 2019;8(1):297-300.
65. Prasanthkumar K, Saravanakumar M, Gunasekar JJ, S Sivakumar S, Masilamani P. Comparative evaluation of puddling techniques in sandy loam soil. *Current Journal of Applied Science and Technology*. 2020;38(6):1-5.
66. Rautaray SK. Puddling effects on soil physical parameters. *Agric Mech Asia Afr Lat Am*. 1997;28:37-40.

67. Rodriguez MS, Lal R. Growth and yield of paddy rice as affected by tillage and nitrogen levels. *Soil and Tillage Research*. 1985;6(2):163-178.
68. Saimbhi VS. Effect of puddling equipment on puddling characteristics under paddy cultivation in punjab. *Int J Agrl Sci and Res*. 2016;2(3):332-338.
69. Saloke VM, Miah MH, Hoki M. Puddling effect on some physical properties of Bangkok clay soil. *Agric Engg. J*. 1993;2(1-2):59-71.
70. Salokhe VM, Miah MH, Hoki M. Effect of blade type on power requirement and puddling quality of a rotavator in wet clay soil. *Journal of Terramechanics*. 1993;30(5):337-350.
71. Sanchez PA. Puddling tropical rice soils: 2. Effects of water losses. *Soil Science*, 1973; 115(4):303-308.
72. Sandhu H, Singh R. Effect of depth and intensity of puddling on quality of soil puddle. *Journal of the Indian Society of Soil Science*. 2001;49(1):35-41.
73. Saroch K, Thakur RC. Effect of puddling (wet tillage) on rice yield and physico-chemical properties of soil. *Soil and Tillage Research*. 1991;21(1-2):147-152.
74. Second Advance Estimates of production of major crops released. (n.d.). Available:<https://pib.gov.in/PressReleaseDetail.aspx?PRID=1899193#:~:text=Total%20production%20of%20Rice%20during,compared%20to%20previous%20year's%20production>.
75. Sharma PK, Bhagat RM. Puddling and compaction effects on water permeability of texturally different soils. *Journal of the Indian Society of Soil Science*. 1993;41(1):1-6.
76. Sharma PK, Datta SK. Effects of puddling on soil physical properties and processes. *Soil Physics and Rice*. 1985;217-234.
77. Sharma PK, Datta SK. Puddling influence on soil, rice development, and yield. *Soil Science Society of America Journal*. 1985;49(6):1451-1457.
78. Sharma PK, Datta SK. Physical properties and processes of puddled rice soils. In *Advances in Soil Science*. Springer New York. 1986;5:139-178).
79. Sharma PK, Datta SK, Redulla CA. Tillage effects on soil physical properties and wetland rice yield. *Agronomy Journal*. 1988;80(1):34-39.
80. Singh KB, Gajri PR, Arora VK. Modelling the effects of soil and water management practices on the water balance and performance of rice. *Agricultural Water Management*. 2001;49(2):77-95.
81. Singh S, Tripathi RP, Sharma P, Kumar R. Effect of tillage on root growth, crop performance and economics of rice (*Oryza sativa*)-wheat (*Triticum aestivum*) system. *Indian Journal of Agricultural Science*. 2004;74(6):300-304.
82. Singh Y, Singh VP, Singh G, Yadav DS, Sinha RKP, Johnson DE, Mortimer AM. The implications of land preparation, crop establishment method and weed management on rice yield variation in the rice-wheat system in the Indo-Gangetic plains. *Field Crops Research*. 2011;121(1):64-74.
83. Swaminathan MS. Scientific management and user of water. *Indian Farming*. 1972;22(2):5-7.
84. Tabbal DF, Lampayan RM, Bhuiyan SI. Water efficient irrigation technique for rice. *Philippine Journal of Crop Science (Philippines)*. 1993;18(1).
85. Tarkiewicz S, Nosalewicz A. Effect of organic carbon content on the compactibility and penetration resistance of two soils formed from loess. *International Agrophysics*, 2005;19(4):345-350.
86. Taylor HM. Effect of drying on water retention of a puddled soil. *Soil Science Society of America Journal*. 1972;36(6):972-973.
87. Valera DL, Gil J, Agüera J. Design of a new sensor for determination of the effects of tractor field usage in southern Spain: Soil sinkage and alterations in the cone index and dry bulk density. *Sensors*. 2012;12(10):13480-13490.
88. Verma AK, Dewangan ML. Efficiency and energy use in puddling of lowland rice grown on Vertisols in Central India. *Soil and Tillage Research*. 2006;90(1-2):100-107.
89. Voorhees WB, Lindstrom MJ. Long-term effects of tillage method on soil tilth independent of wheel traffic compaction. *Soil Science Society of America Journal*. 1984;48(1):152-156.
90. Wang X, Liang W, Wen D. Effects of intermittent irrigation on ecological and physiological water requirement of rice in north China. *Ying Yong Sheng tai xue bao= The Journal of Applied Ecology*. 2004;15(10):1911-1915.

91. Warkentin BP. Water retention and swelling pressure of clay soils. Canadian Journal of Soil Science. 1962;42(1):189-196.
92. Yao S, Teng X, Zhang B. Effects of rice straw incorporation and tillage depth on soil puddlability and mechanical properties during rice growth period. Soil and Tillage Research. 2015;146:125-132.
93. Yun-Sheng Cheng. Drainage of paddy soils in Taihu lake region and its effects; 1983.

© Copyright (2024): Author(s). The licensee is the journal publisher. This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:

<https://www.sdiarticle5.com/review-history/116349>